

[トップページ](#)[会社情報](#)[商品一覧](#)[販売協力](#)[お問い合わせ](#)



Exceed


## LED ムービングWashライト Exceed

# EXCEED




入力電源	AC90 ～240V 50/60Hz
最大電力	245W
LED	OSRAM OSTAR RGBW 10W x 19pcs
ディマー	0～100%
ズーム	11°～58°
照度	22600lux (アングル11° 距離 2m) 2000lux (アングル58° 距離 2m)
マクロ	カラーエフェクト機能
コントロール	DMX512/オートプログラム/マスタースレーブ
DMXチャンネル	14ch /25ch
DMXコネクタ	3P/5P
灯体サイズ	324 x 203 x 390.4mm
重量	8.2kg

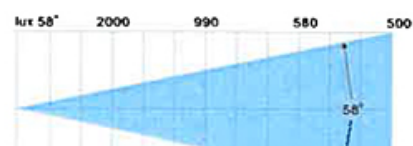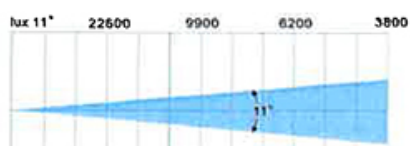

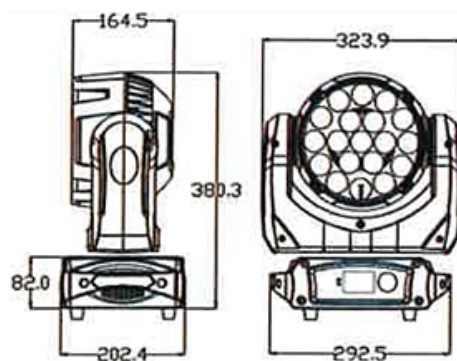

製品のお問合せはこちらから



[サイトマップ](#)

Copyright FourLeaf Inc. All Rights Reserved.

## 7. DMX Channels

Channel	Value	Function
1 Strobe	0-1	Strobe open
	2-64	Closing pulse (slow→ fast)
	65-127	Opening pulse (slow→ fast)
	128-190	Adjust random strobe (slow→ fast)
	191-253	Adjust random strobe
	254-255	Strobe open
2 Dimmer	0-255	Dimmer ( dark → bright)
3 Focus	0-255	Focus (Big → Small)
4 Pan	0-255	Pan 0° - 540°
5 Pan Fine	0-255	Pan Fine 16-Bit
6 Tilt	0-255	Tilt 0°-212°
7 Tilt Fine	0-255	Tilt Fine 16-Bit
8 FUNCTION	0-59	No Function
	60-64	Fans Full Speed
	65-69	No Function
	70-74	Fans Adjust Speed
	75-79	No Function
	80-84	Display Positive
	85-89	No Function
	90-94	Display Reverse
	95-99	No Function
	100-104	Display Backlight Open
	105-109	No Function
	110-114	Display Backlight Auto Control
	115-119	No Function
	120-124	Reset
	125-129	No Function
9 LED MICRO	0-3	No MACRO Function
	4-67	Fixed MACRO Function, RGB LED interchange
	68-131	Fixed MACRO Function, RGBW LED interchange
	132-255	LED MICRO Function
10 RED	0-255	Dark→ Bright Dimmer, Color Macro Adjust Red LED Dimmer
11 GREEN	0-255	Dark→ Bright Dimmer, Color Macro Adjust Green LED Dimmer
12 BLUE	0-255	Dark→ Bright Dimmer, Color Macro Adjust Blue LED Dimmer
13 WHITE	0-255	Dark→ Bright Dimmer, Color Macro Adjust White LED Dimmer
14 BEAM CTC	0-1	No Function
	2-255	BEAM CTC
15 Strobe 2	0-255	Light off for 0~5.10 seconds

16 Strobe 3	0-255	Light up in 0~5.10 seconds
17 Strobe 4	0-255	Bright keep in 0~5.10 seconds
18 Strobe5	0-255	Light off in 0~5.10 seconds
19 FADE	0-255	Aura Speed (fast→slow)
20 HA LED Strobe	0-1 2-64 65-127 128-190 191-253 254-255	Shutter open Closing pulse (slow→ fast) Opening pulse (slow→ fast) Adjust random Shutter (slow→ fast) Adjust random Shutter Shutter open
21 HA Led DIMMER	0-255	Dark to bright Aura dimmer
22 HA Led MICRO	0-3 4-67 68-131 132-255	No MACRO Function Fixed MACRO Function, RGB Aura interchange Fixed MACRO Function, RGBW Aura interchange Aura MACRO Function
23 HA RED	0-255	Dark→ Bright Dimmer, Color Macro Adjust Red LED Aura
24 HA GREEN	0-255	Dark→ Bright Dimmer, Color Macro Adjust Green LED Aura
25 HA BLUE	0-255	Dark→ Bright Dimmer, Color Macro Adjust Blue LED Aura